



FLANGE SPREADER

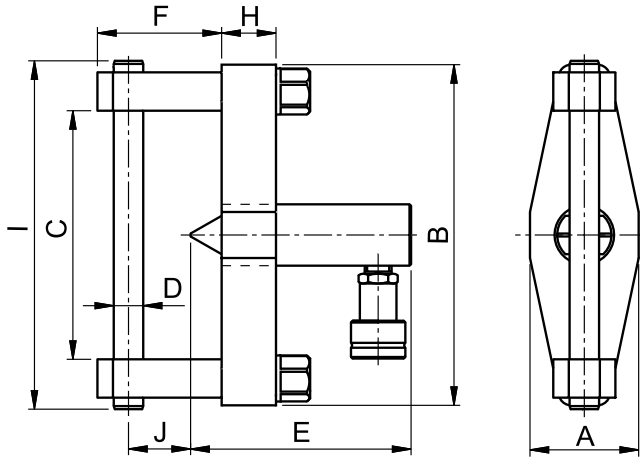

- Force **5 - 10 t**
- Opening **48 - 223 mm**
- Pressure: **700 bar**

FEATURES

The UA Europress flange spreader is completely Nitreg treated (excluded the aluminium parts) for a bigger strength and resistance to corrosion. It's equipped with a standard CMI Europress cylinder, easy to use, safe and lightweight. It's available in the version of 5 and 10 ton, with a working pressure of 700 bar.

The flanges can be regulated to reach an opening from 48 to 223 mm.

It's supplied complete with the coupler.

OPERATIONAL AERAS

Petrochemistry industry, industrial and shipyards maintenance are the fields where this useful and essential tool is mostly used..



For the best use of UA Flange Spreader we recommend our hand pumps model **PS100** or **PL140**.

p. 53

p. 49

SELECTION CHART

Pushing force	Flange opening	Stroke	Oil volume	MODEL	Dimensions mm										Weight
					t	mm	mm	cm ³	A	B	C	D	E	F	
5	3 - 25	50	35	UA5	70	220	48-161	19	143	80	35	227	40	4,0	
10	4 - 35	50	80	UA10	100	300	64-223	32	153	90	50	315	50	9,5	