Marking Pen


Fuji Marking Pen features a lower vibration level when compared to conventional marking pens enabling operators to use this tool for a full working day. This tool also requires no lubrication and meets requirements where oil free operation is specified.



Model	Dia	neter	Overall Length		Wei	ght	Air Consumption (at Load)		
	mm	in	mm	in	kg	lb	m³/min	ft³/min	
G-400	20	25/32	140	5 1/2	0.15	0.33	0.03	1.1	

Air Cleaners

Fuji Air Cleaners remove dust, chips, sawdust, water and oil with their powerful vacuum action.

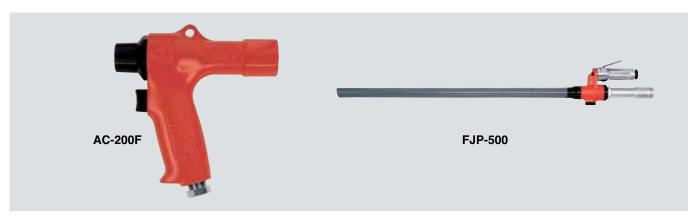

Model	Vacuum Degree		Overall Length		Outside Dia. of Discharge	Weight		Max. Air Consumption		Air Inlet Thread Size	Air Hose Size	
	mm Hg	in Hg	mm	in	mm	kg	lb	m³/min	ft³/min	BSP or NPT	mm	in
AC-200F	130	5 1/8	145	5 45/64	34	0.5	1.1	0.60	21.2	1/4	9.5	3/8
FJP-500	200	7 7/8	1020	40 5/32	37.5	1.5	3.3	1.10	38.8	3/8	9.5	3/8

Accessories Provided for AC-200F



Index No.	AC No.	Name			
1	ACB-1F	Main Nozzle			
2	ACB-2F	Fan Shape Nozzle			
3	ACB-3F	Small-Size End Nozzle			
4	ACB-4F	Flexible Hose			
5	ACB-5F	Rubber Joint			
6	ACB-6F	Dust Bag			
7	ACB-7F	Hose Band			