

Medium Size Pistol Grip Models

19mm (3/4")~25.4mm (1")



FW-19PX-5



FW-250P-1,2



FW-320P-1

Model	Bolt Size	Recommended Torque Range			Max. Torque	Free Speed	Square Drive Size		Overall Length (without socket)		Weight (without socket)		Air Consumption (at Load)		Air Inlet Thread Size	Air Hose Size	
		mm	N · m	kgf · m			ft · lb	N · m	min ⁻¹	mm	in	mm	in	kg		lb	m ³ /min
FW-19PX-5	M18	235~450	24.0~45.9	173.3~331.9	560	5,000	19.0	3/4	239	9 13/32	4.4	9.7	0.6	21.2	1/4	9.5	3/8
FW-250P-1	M24	380~1040	38.8~106.1	280.3~767.0	1200	5,000	25.4	1	228	8 31/32	5.3	11.7	0.7	24.7	3/8	12.7	1/2
FW-250P-2	M24	380~1040	38.8~106.1	280.3~767.0	1200	5,000	19.0	3/4	228	8 31/32	5.3	11.7	0.7	24.7	3/8	12.7	1/2
FW-320P-1	M30~M33	600~1800	61.2~183.6	442.5~1327.5	2300	4,800	25.4	1	268	10 36/64	8.0	17.6	1.0	35.3	3/8	12.7	1/2


*FW-19PX-5 is single clutch type. Other Models are 2-Jaw clutch types.

Heavy Duty Straight Models

38.1mm (1 1/2")~63.5mm (2 1/2")



FW-50-7, 75-7

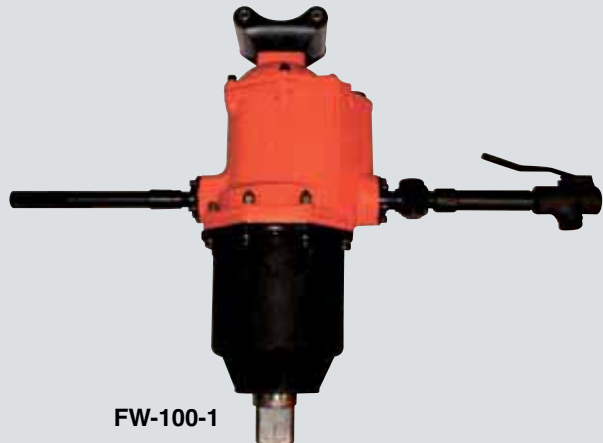

FW-100-1

Model	Bolt Size	Recommended Torque Range			Max. Torque	Free Speed	Square Drive Size		Overall Length (without socket)		Weight (without socket)		Air Consumption (at Load)		Air Inlet Thread Size	Air Hose Size	
		mm	N · m	kgf · m			ft · lb	N · m	min ⁻¹	mm	in	mm	in	kg		lb	m ³ /min
FW-50-7	M50	3300~7050	336.6~719.1	2433.8~5199.4	8400	4,000	38.1	1 1/2	500	19 11/16	33.0	72.6	1.9	67.3	1	19.0	3/4
FW-75-7	M68	5100~12400	520.2~1264.8	3761.3~9145.0	14000	3,000	63.5	2 1/2	610	24 1/64	60.0	132.0	2.1	74.9	1	19.0	3/4
FW-100-1	M76	9250~20800	943.5~2121.6	6821.9~15340.0	22000	2,500	63.5	2 1/2	700	27 9/16	85.0	188.7	3.2	114.1	1	25.4	1

*All Models are double clutch types.